MOP.06.6 多回路选择阀

MOP.06.6 FLOW DIVERTERS

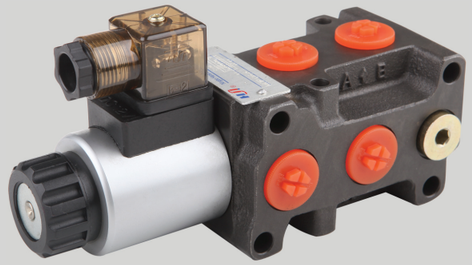

符号 SYMBOL



MOP.06.6管式连接的多回路选择阀，最多可以5个元件连接在一起，供给6个回路工作。这种阀可以以最小的压力损失控制系统的油路。

The stackable circuit selector valves, type MOP.06.6,allows one single drive of 6 users with 5 elements connected in series. As they are moved from high performances solenoids they don't need the external drainage .
This valves can manage high hydraulic powers with a minimal pressure drop.

多个元件 MULTSTATION CONNECTION



技术参数 Technical data

型号 Model	MOP.06.6
最大流量（L/min）Max Flow rate（L/min）	50
最大工作压力（Mpa) Max operating pressure（MPa）	25
阀体（材料）表面处理 Valve body（Material）Surface treatment	（铸件）表面磷化处理/（casting）phosphating surface
油液清洁度 Oil cleanliness	NAS1638 9级和ISO4406 20/18/15级 NAS1638 class 9 and ISO4406 class 20/18/15

安装尺寸 Installation Dimensions

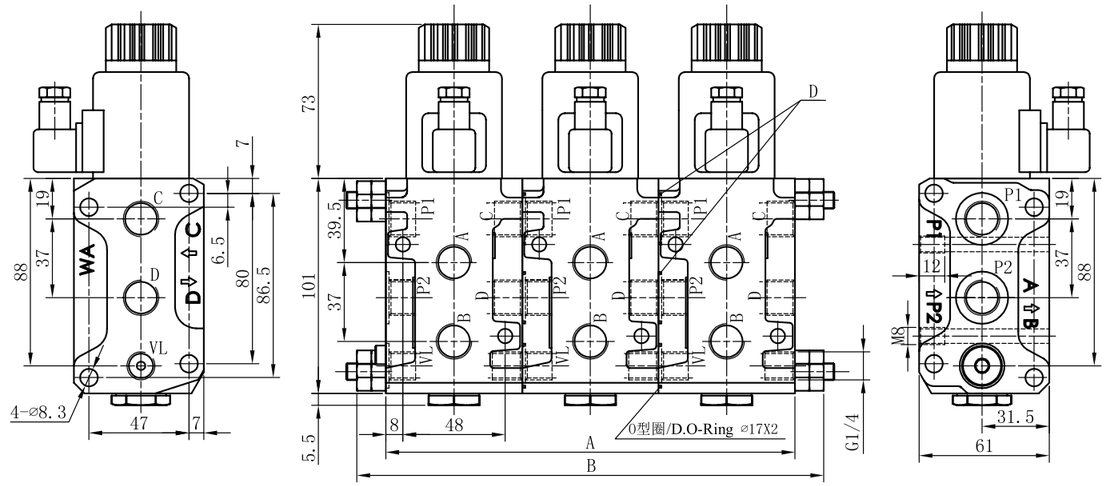

D.O 型圈 / D.O–Ring:
M18X1.5/G3/G8=Φ21X2
M22X1.5/G1/G2=Φ23.5X2
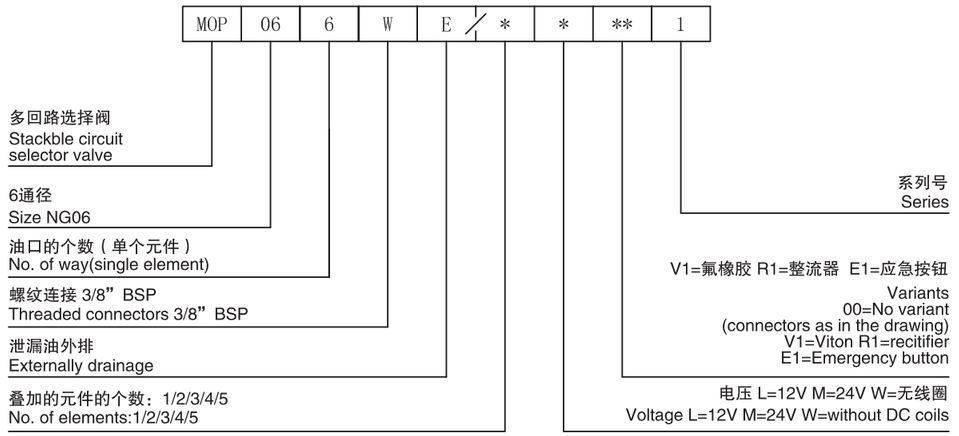
元件 elements	通路 way	A	B
个数 No . of		长度(mm) Lengths (mm)	
1	6	64	86
2	8	128	138
3	10	192	214
4	12	256	278
5	14	320	342